

AMENDMENTS TO THE DRAWINGS

In response to the Office action identified above,
Fig. 2-5 has been revised. One clean copy of Fig. 2-5
5 has been provided along with one marked copy showing
the changes made.

In Fig. 2, the acoustic signal input device (22)
comprises an amplifying element array (30), and the
acoustic signal output device (26) comprises another
10 amplifying element array (40). The hearing aid device
receives an acoustic signal input and outputs an acoustic
signal output.

In Fig. 3, the acoustic signal input device (22) receives
an acoustic signal input and comprises an amplifying element
15 array (30).

In Fig. 4, the acoustic signal output device (26) comprises
an amplifying element array (40) and outputs an acoustic signal
output.

In Fig. 5, the bandpass filter (32) comprises two acoustic
20 receiving units (11), (12) with different resonant
frequencies and a differential amplifier (13).

No new matter is introduced.

25

Attachment: Replacement Sheet
Annotated Sheet Showing Changes

30

REPLACEMENT SHEET

5

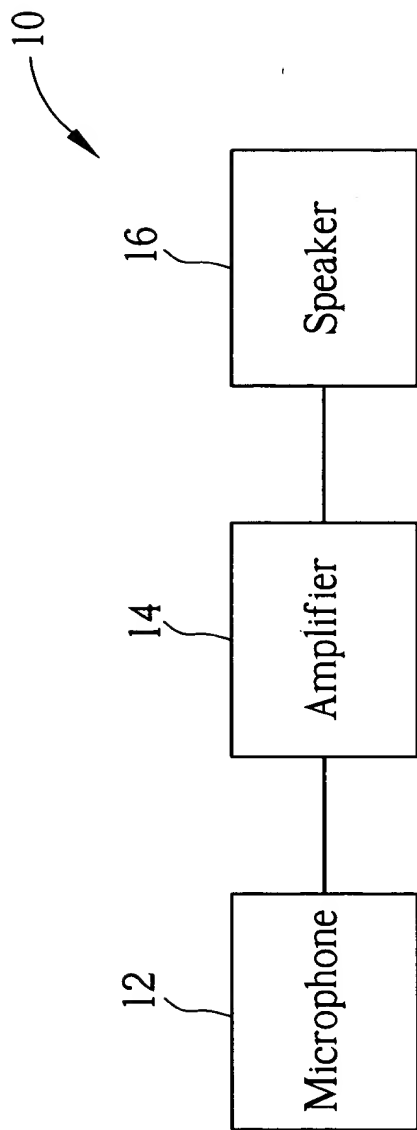


Fig. 1 Prior art

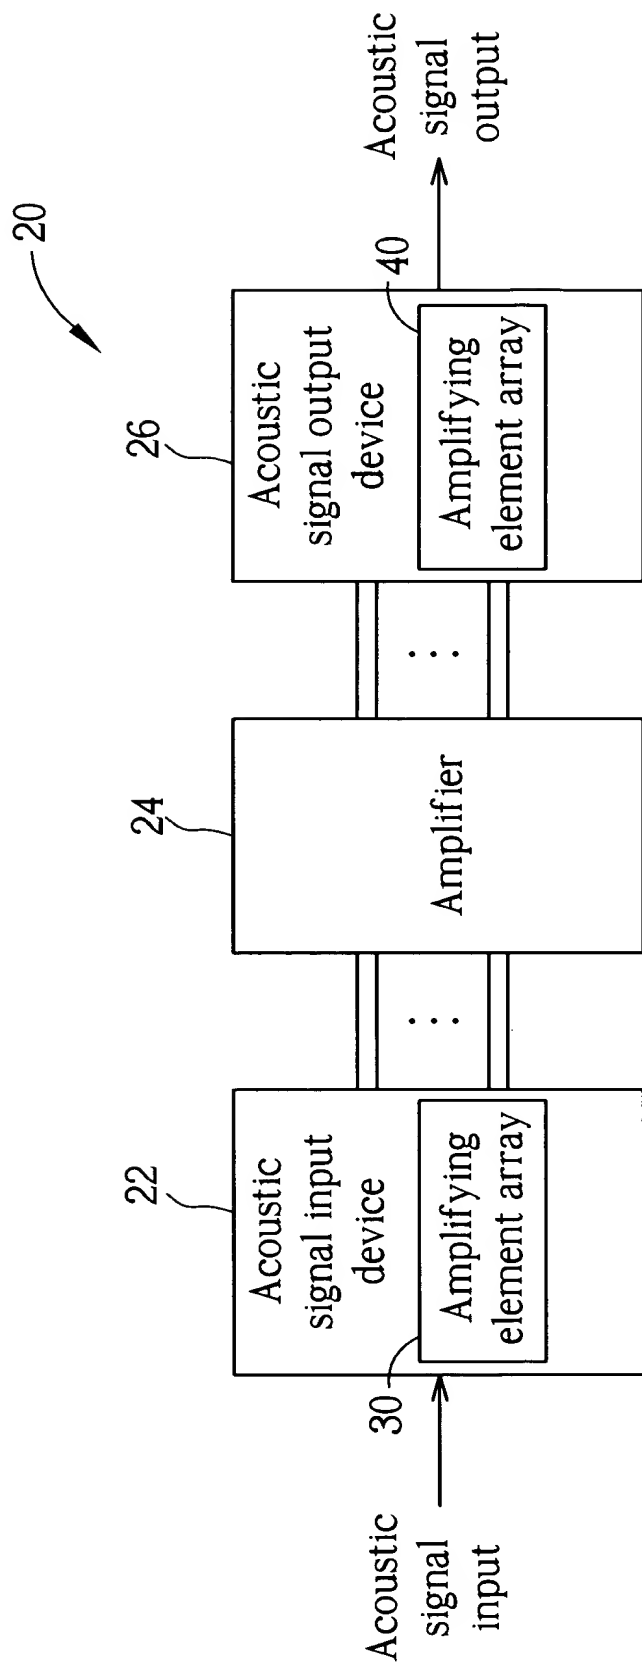


Fig. 2

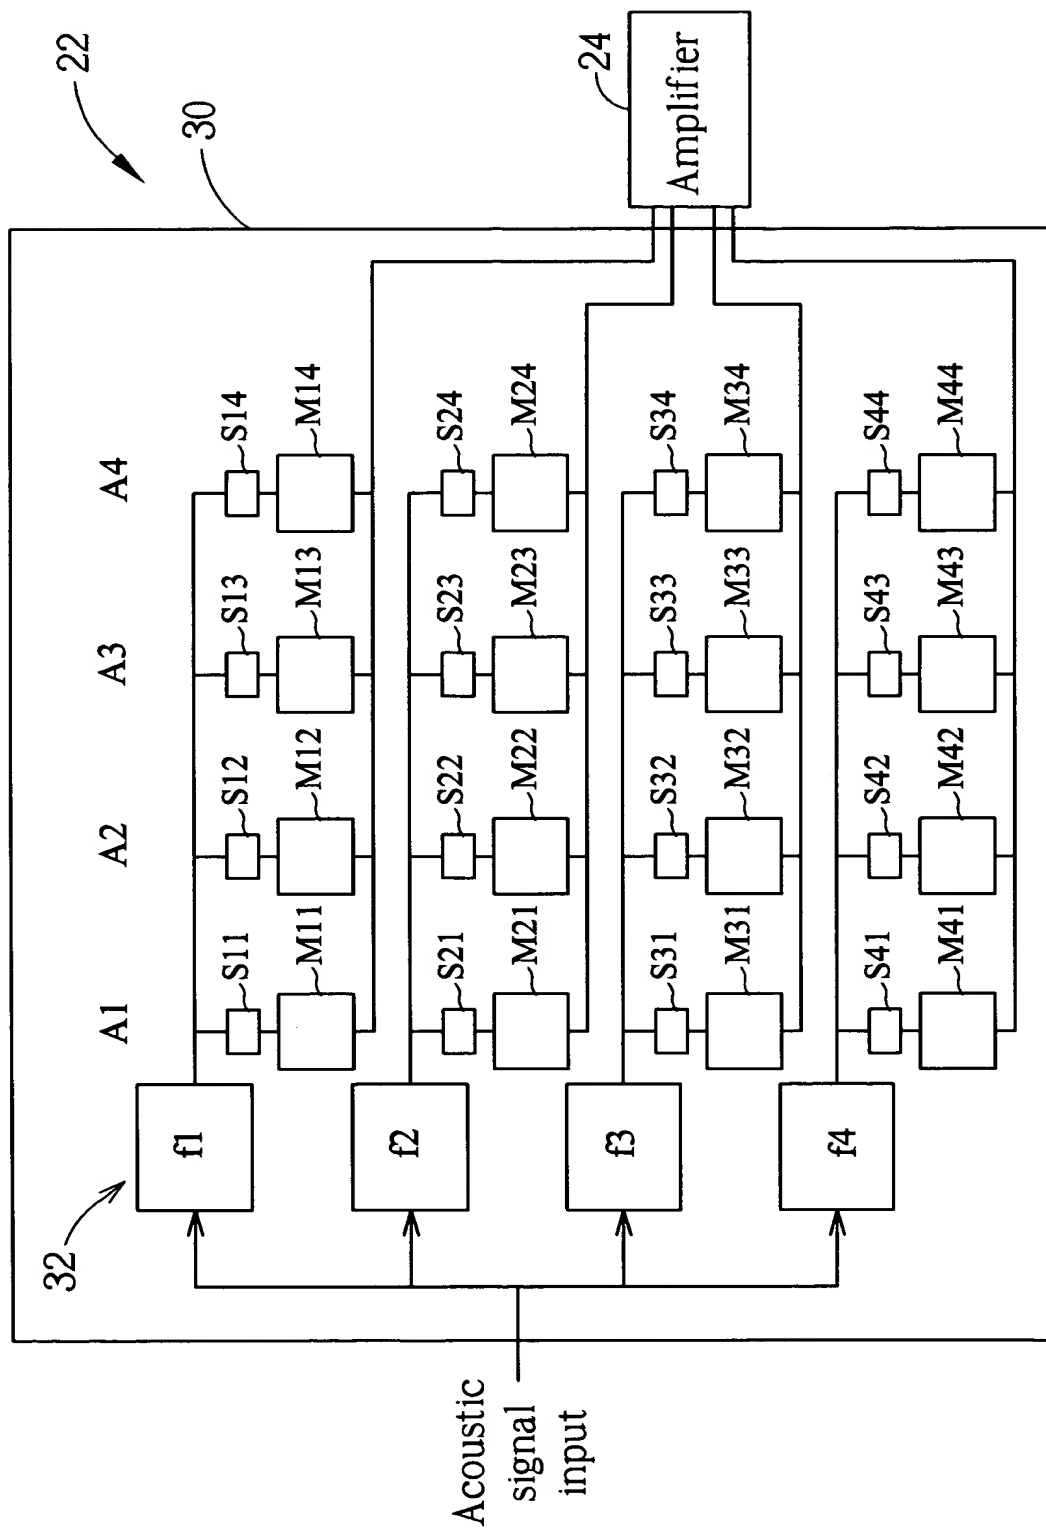


Fig. 3

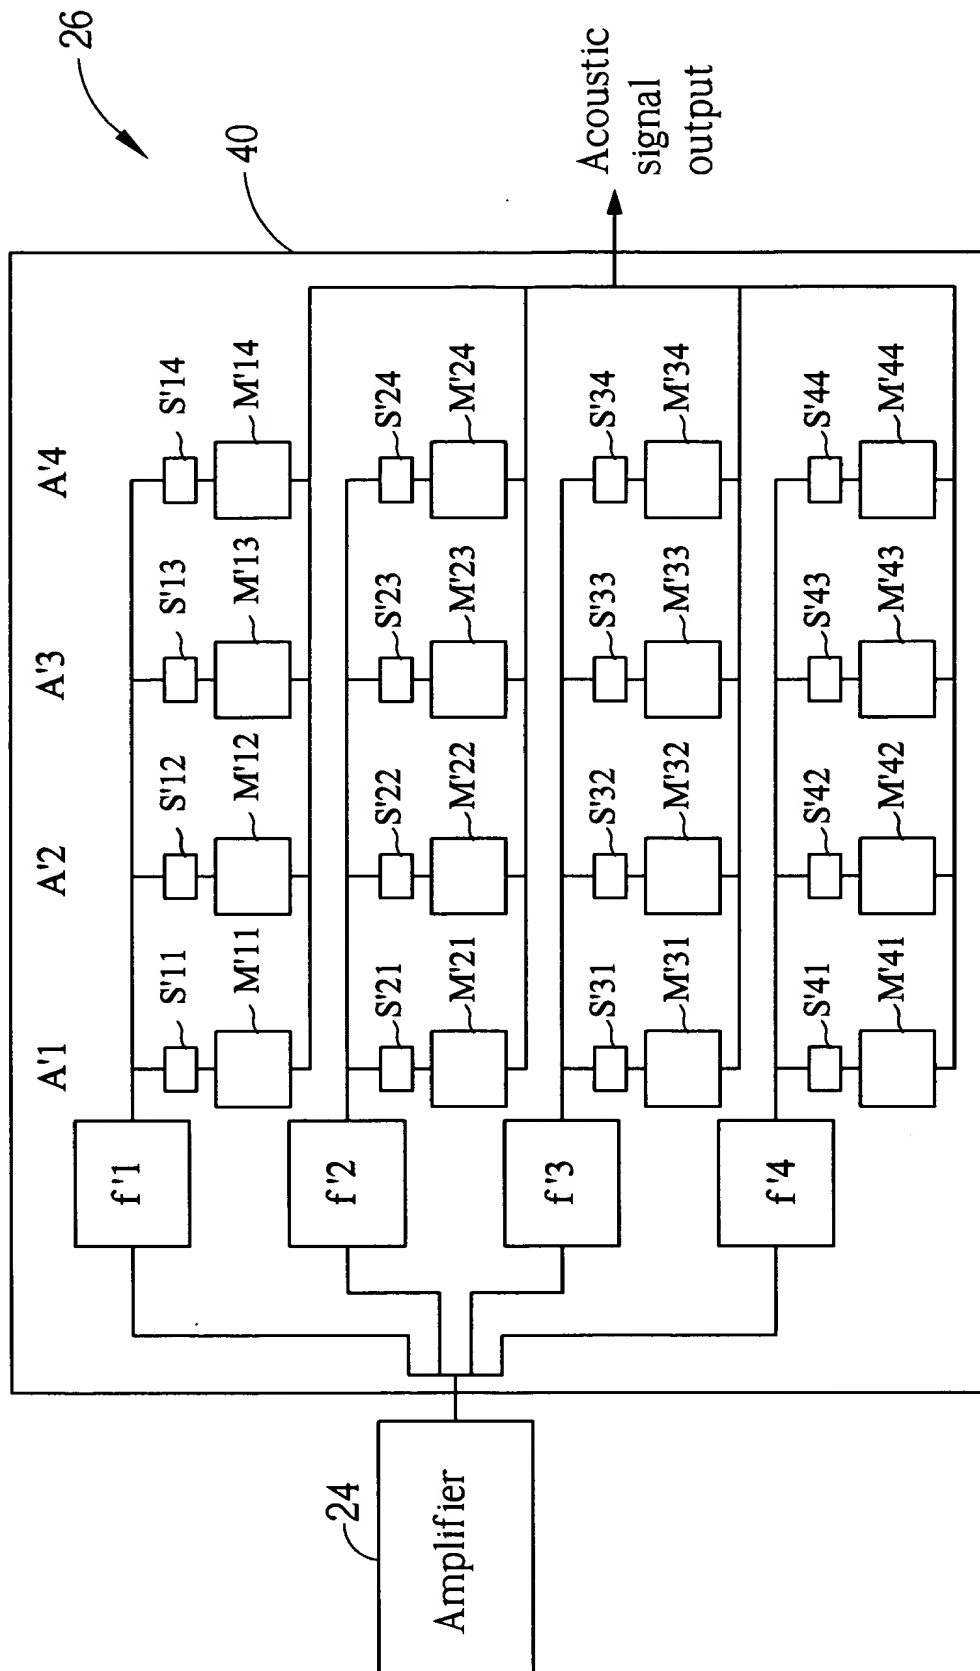


Fig. 4

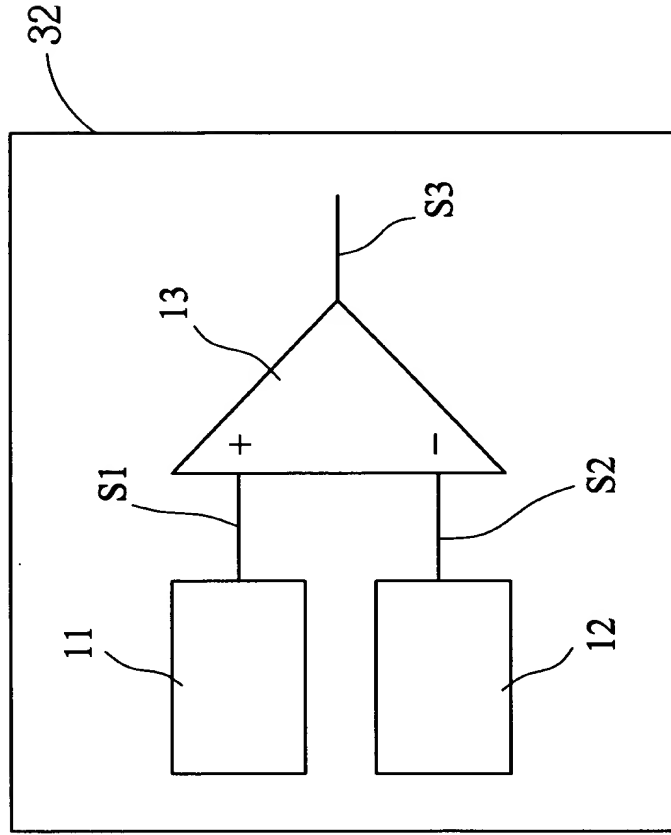


Fig. 5